



SPECIFICATIONS

Model Number	SR-1003-360
Operating Range	10 to 400 meters (33 to 1,312 ft)
Detection Ranges	350 meters (1,148 ft), for crawling human 400 meters (1,312 ft), for walking human 600 meters (1,969 ft), for light vehicle 800 meters (2,625 ft), for heavy vehicle
Range Resolution	3 meters (10 ft) x 3° azimuth
Azimuth Beamwidth	3°
Elevation Beamwidth	10°
Coverage	360° azimuth
Frequency	24.125GHz
Radiating Power	less than 250µV/m at 3 meters (10 ft)
Input Power	10 to 30 Volts AC or DC, 10 Watts
Scan Rate	1 revolution per second
Dimensions	Height: 20 cm (8") Diameter: 40 cm (12.2")
Weight	6 Kg (14 Lbs)
Operating Temperatures	-40°C to 70°C (-40°F to 120°F)
Alarm & communications	RS-232, RS-485, Ethernet (TCP-IP) and GIS



**K&G Spectrum Inc.**  
15 Buteau Street, suite 230-9  
Richelieu Industrial Park  
Gatineau, Quebec, Canada  
J8Z 1V4

Toll Free 1-877-283-5872  
Telephone 1-819-595-0856  
Fax 1-819-595-4820  
email [sales@kgspectrum.com](mailto:sales@kgspectrum.com)

Automated Detection and Tracking Response to Security Threats



[www.kgspectrum.com](http://www.kgspectrum.com)

Printed in Canada [www.trinergie.ca](http://www.trinergie.ca)

SR-1003-360 Perimeter Surveillance Radar



# SR-1003-360

Perimeter Surveillance Radar



- GOOD COST EFFICIENCY
- ALL WEATHER CAPABILITY

1,600m  
diameter protection  
for vehicles

360°  
every second

1

## UNIQUE TECHNOLOGIE




### ADVANTAGES

- ▶ **Millimeter Wave**  
Small Size  
Immune to Environment Changes
- ▶ **Spread Spectrum Technology**  
Immune to Interferences  
Multiple Sensors
- ▶ **Doppler Radar**  
Tracking Capability  
Intrusion Audio Signature

The SR-1003-360 from Spectrum is a low power ground surveillance radar designed to provide automatic human and vehicle detection for perimeter security applications. It can properly operate in almost any weather conditions providing accurate detection with a very low false alarm rate. The SR-1003-360 surveillance radar scans a full 360° every second with a range up to 800 meters (2,625 feet), offering a 1,600 meters (5,249 feet) diameter protection.

The SR-1003-360 also detects intruders crossing at 90° scanning angle which is a major advantage over some other ground based surveillance radar competitors. The combination of two SR-1003-360 can track multiple intrusions, zoom on up to two intrusions to extract the doppler audio signature while performing full 360° scan every second.

- ▶ Automated Detection
- ▶ Tracking Response to Security Threats

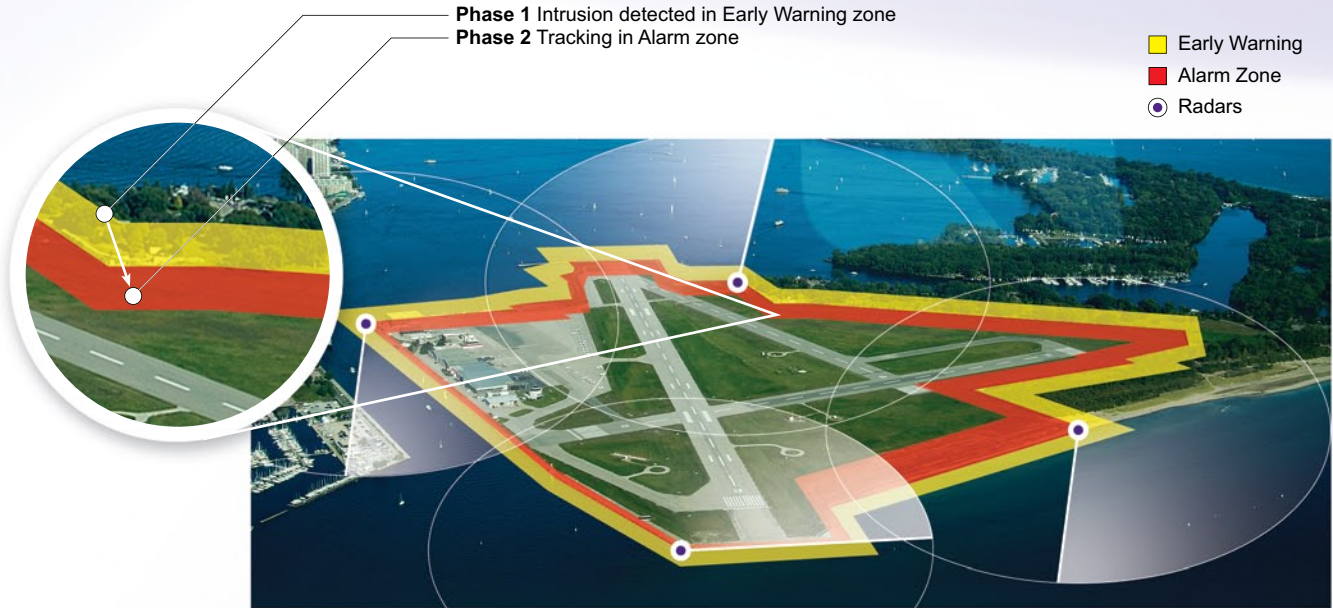

2

## NETWORKING CONFIGURABILITY

The SR-1003-360 unit can also be networked together and with other KG Spectrum's fix sensor models for full protection of open areas, fenced compounds and potential blind spots. There is no frequency interferences between sensors using proprietary spread spectrum modulation allowing easy deployment of multiple sensors.

### BENEFITS

- Early warning of potential intruders
- Continuous tracking of intruders
- Ease of use with user friendly software
- Operates in almost any weather conditions
- Low false alarm rates
- Full camera integration
- Cost effective

### APPLICATIONS

- Detect humans and vehicles
- Perimeter protection
- Border security
- Wide open area security
- Fenced compounds security
- Military installations
- Guarded facilities

3

## INTEGRATED SOLUTION

The SR-1003-360 can also track multiple intruders while zooming to extract doppler audio, scanning 360° and also control long range high performance cameras to allow proper visual identification of potential security threats. The system allows proper integration to surveillance cameras and other surveillance products by providing instant target location and direction.



4

## USER FRIENDLY SOFTWARE

The software and graphical user interface allows easy to configure detection zones with early warning, detection and critical areas for different levels of security warnings providing accurate security intrusion detection around the clock.